

SPECIFICATIONS



KPO12-43-3

COOLING CAPACITY

BTU/hr @ 95F at 60% RH	135,000 (12-Ton)
Operating Temperatures	30 - 110 F 50%RH

HEATING OPTION

Heat Strips / BTU	24kW/83,300
-------------------	-------------

COMPRESSOR DATA

Compressor Type	Scroll
Refrigerant	454B

FAN DATA

EVAPORATOR

Fan Type (Centrifugal)	Direct Drive
Air Flow	5,500 CFM
Supply and Return Air Device	2 - 12" flanges for supply and 2 - 12" for return
Maximum Duct length	75 Ft.

CONDENSER

Fan Type (Centrifugal)	Belt Drive
Air Flow	8500 CFM
Condenser Exhaust flange	20"
Condenser Duct Max Length	100"
Condenser fan speed control	Variable Frequency Drive

ELECTRICAL DATA

Power Supply	460v/ 3 Phase
Current Consumption	29.7 amps
Power Consumption	21.49 kW
Maximum Circuit Breaker	50 amps
Recommended Breaker Size	40 amps
Minimum Circuit Ampacity	35 amps
Min./Max. Voltage	420-500
Power Quality Control	Internal Phase and Power Monitor
Power Connection	Color Coded Male Camlocks

CONSTRUCTION

Skid	12 Gauge G90 Galvanized Steel / Epoxy Powdercoat
Cabinet	16 Gauge G90 Galvanized Steel / Epoxy Powdercoat
Casters	8" Heavy Duty Swivel / Locking





DIMENSIONAL DATA

Width x Depth x Height	32" x 64" x 60" w/8" Casters
Weight	1,100
Shipping Weight	1,200

SAFETY DEVICE DATA

Compressor Overload	Internal
Fan Motor Overload	Automatic Internal
Evaporator Freeze Protection	Hot gas bypass
High Pressure Switch	Manual
Low Pressure Switch	Automatic
Compressor Short Cycle	Yes
Automatic Restart	Yes
Thermostat Type	Digital
Condensate Pump Overflow	Yes
Internal Condensate Pump (high lift)	Yes

SPECIFICATIONS

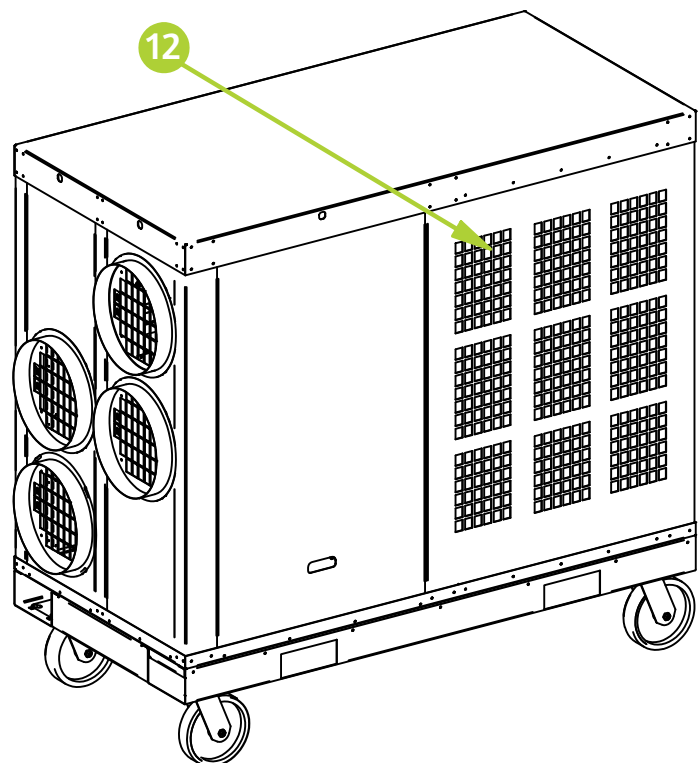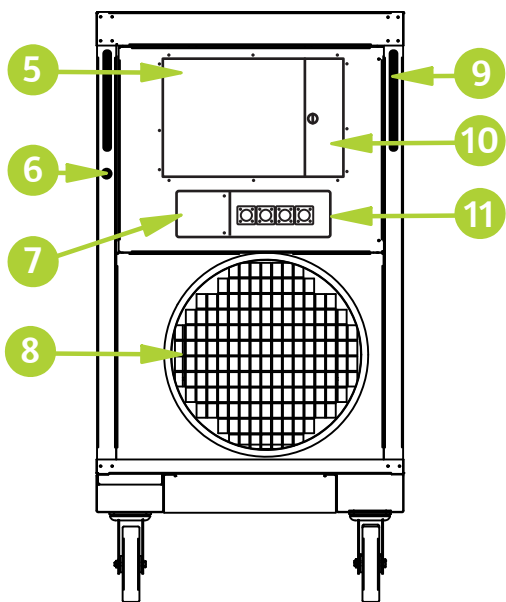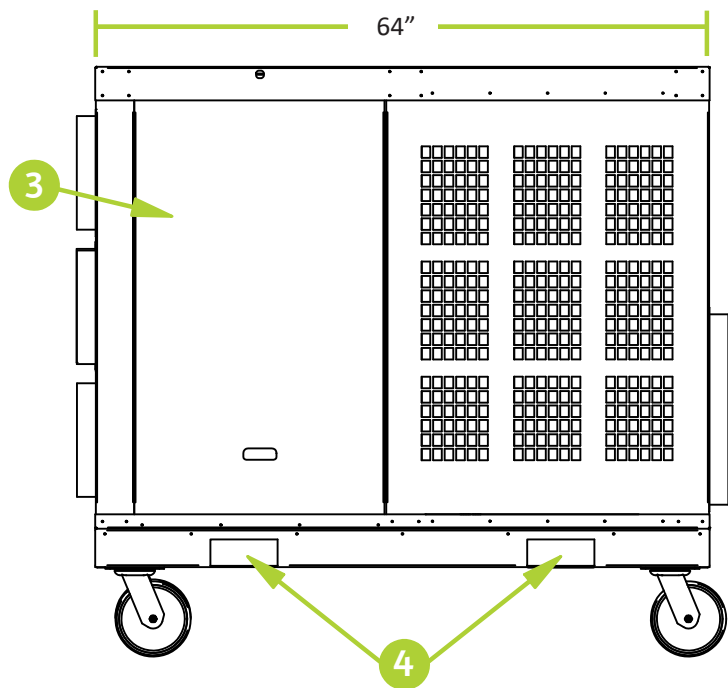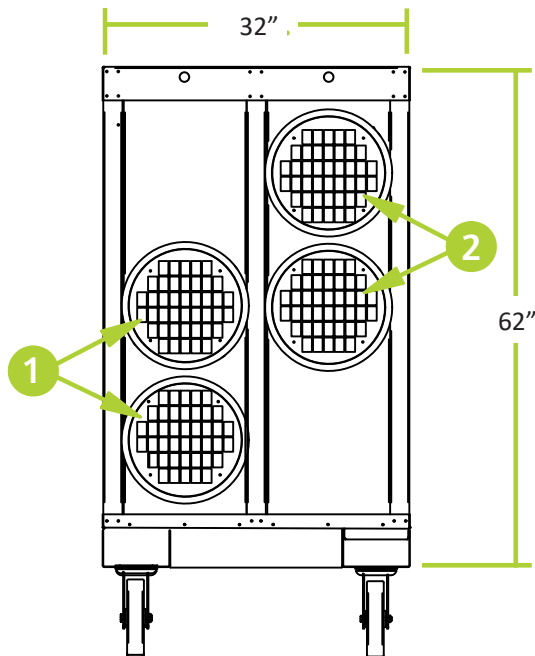

KPO12-43-3

- | | |
|----------------------|--------------------------|
| 1. Cold Air Return | 7. Breaker Access |
| 2. Cold Air Supply | 8. Condenser Air Outlet |
| 3. Access Door | 9. Handle |
| 4. Forklift Pockets | 10. Control Panel Access |
| 5. Electrical Panel | 11. Camlock Connections |
| 6. Condensate Nipple | 12. Condenser Air Inlet |



KWIKOOL.COM