

SPECIFICATIONS







KWIB1811-3

COOLING CAPACITY	BTU/hr @ 95F at 60% RH	17,700 (1.5-Ton)
COMPRESSOR DATA	Compressor Type	Hermetic Rotary
	Operating Temperatures	60-110 F 50%RH
	Refrigerant	R 454 B
FAN DATA	Fan Type (Centrifugal)	Direct Drive
Evaporator	Air Flow (CFM)	600/3 Speed
	Supply Air Device	Adjustable Vent
	Supply Air Chute Kit (optional)	2 - 5" Dia. x 16" Length
Condenser Water Flow Data	Flow Regulating Valve 1/2"NPT	Automatic
	Inlet Water 85F-95F Exit (GPM)	4.5
	Inlet Water 75F-95F Exit (GPM)	2.25
	Inlet Water 65F-95F Exit (GPM)	1.5
	Inlet Water 55F-95F Exit (GPM)	1.2
ELECTRICAL DATA	Power Supply (Volts)	115/Single Phase
	Current Consumption (Amps)	13.6
	Power Consumption (kW)	1.41
	Maximum Circuit Breaker (Amps)	20
	Recommended Breaker Size (Amps)	15
	Minimum Circuit Ampacity(Amps)	16.375
	Min./Max. Voltage	105-125
	Power Cord Gauge/Length	14AWG/6'
	Plug Configuration	NEMA 5-15
DIMENSIONAL DATA	Width x Depth x Height (Inches)	16" x 22" x 38"
	Weight (Lbs.)	165
	Shipping Weight (Lbs.)	215
SAFETY DEVICE DATA	Compressor Overload	External
	Fan Motor Overload	Automatic Internal
	Evaporator Freeze Protection	Hot Gas Bypass
	High Pressure Switch	Manual
	Low Pressure Switch	Automatic
	Compressor Short Cycle	Yes
	Automatic Restart	Yes
	Thermostat Type	Microprocessor/Digital
	Condensate Pump Overflow	Yes
	Condensate Tank Overflow	Yes

KWIKOOL.COM



1-800-KWIKOOL

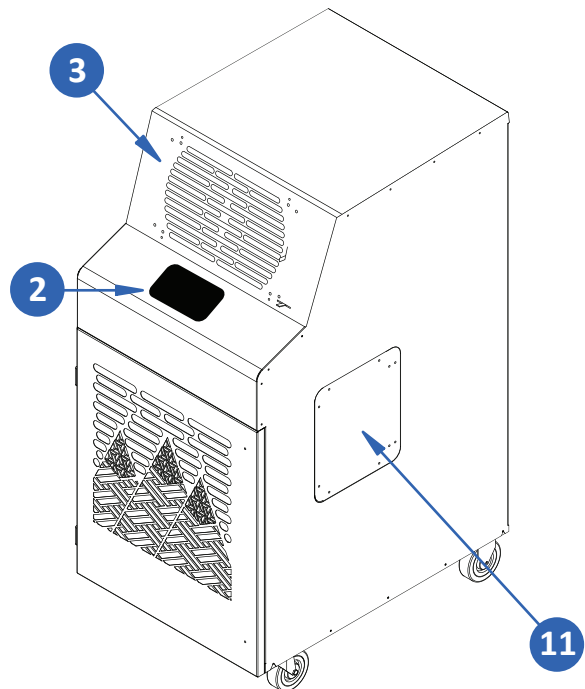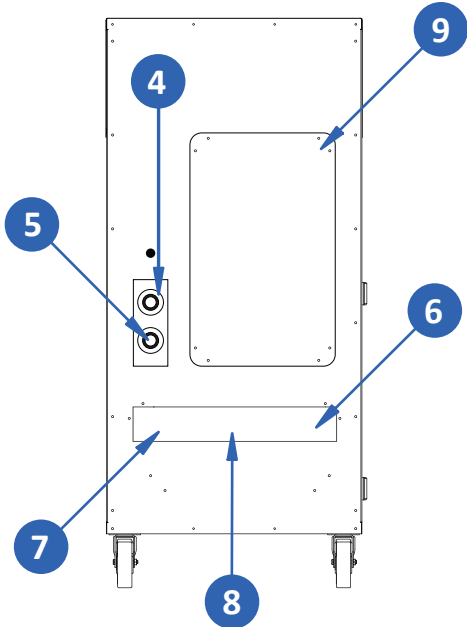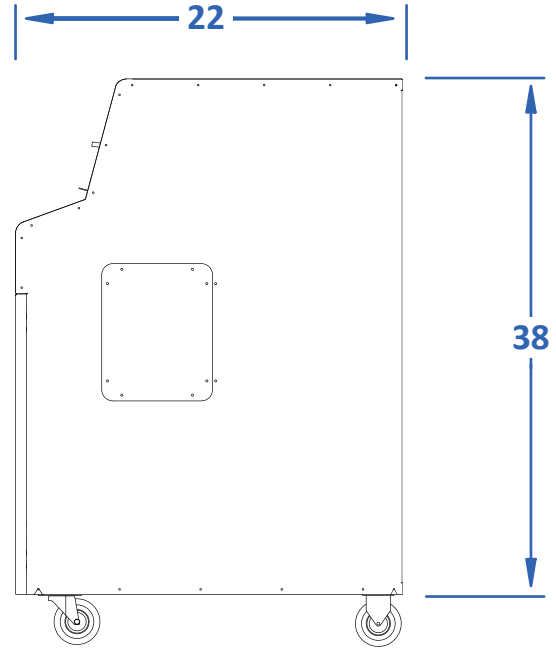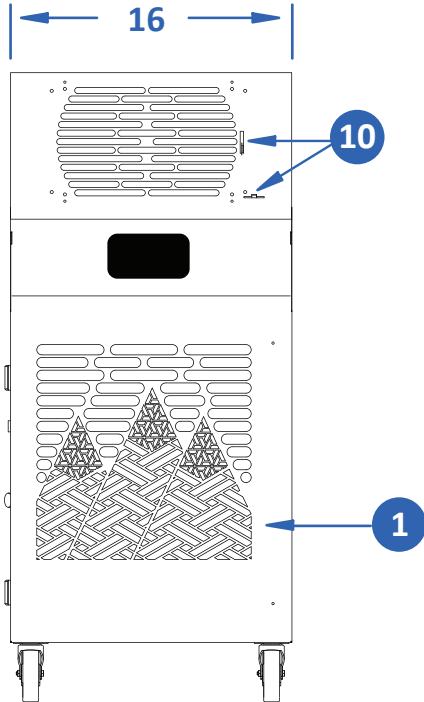

KWIB1811-3

- | | | |
|---------------------------|--------------------------|----------------------------|
| 1. Cold Air Return | 6. Cord Storage | 11. Mechanical Access Door |
| 2. Touch Screen Control | 7. Condensate Nipple | |
| 3. Cold Air Supply | 8. Condensate Alarm Jack | |
| 4. Condenser Water Inlet | 9. Elec. Access Door | |
| 5. Condenser Water Outlet | 10. Vent Control | |



KWIKOOL.COM