



# Specifications

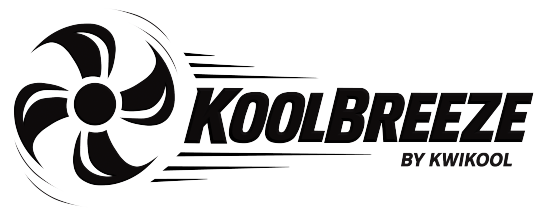

**KB280X2**

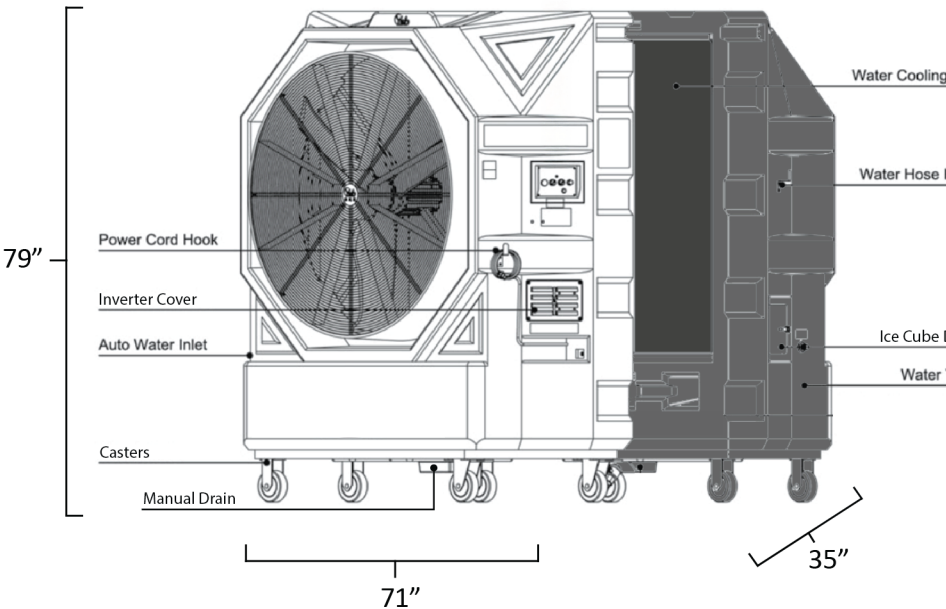

|                  |                        |                        |
|------------------|------------------------|------------------------|
| MODEL DATA       | Model                  | KB 280X2               |
|                  | External Frame         | Polyethylene           |
| LOUVERS          | Horizontal Motion      | N/A                    |
|                  | Vertical Motion        | N/A                    |
| PERFORMANCE DATA | Max. Rotating Speed    | 660 RPM                |
|                  | Max. Air Distance      | Up to 98.4'            |
|                  | Max. Sound Level       | 67 dB                  |
|                  | Airflow (CFM)          | 26,000                 |
|                  | Airflow (CFM)          | Up to 7500 sq. ft.     |
| MECHANICAL DATA  | Blades                 | 50" 3 SMC Fiberglass   |
|                  | Pole                   | 10P                    |
|                  | Motor                  | 2 HP                   |
| ELECTRICAL DATA  | Voltage                | 1-Phase 220V, 50/60 Hz |
|                  | Max. Current           | 7.6 A $\pm$ 10 %       |
|                  | Max. Power Consumption | 1085 W/hr $\pm$ 10 %   |
| CAPACITY DATA    | Water Storage          | 61 gal                 |
| DIMENSIONAL DATA | Size (W x H x D)       | 71" x 79" x 35"        |
| WEIGHT DATA      | Weight (Empty)         | 353 lbs                |
|                  | Total Weight (Full)    | 860 lbs                |